

Quick Flush™

- The only clean water flushing system
- Cuts clean-up time of airless sprayers
- Connects to standard garden hose to backflush water base paint through gun
- Includes "F" and "G" adapters for use with all brands of airless gun

Airlessco Part # 170-005



Patent Pending

It's Easy to Use!

Step 1:


Follow the Pressure Relief Procedure and lift the suction assembly out of the paint container. Cycle pump slowly and allow it to empty paint out of the suction assembly and the fluid pump.

Step 2:

Turn machine off, place suction assembly into a clean empty bucket & close the prime pressure valve.


Step 3:

Remove tip and guard from gun & clean the individual pieces. Attach Quick Flush System to the gun.

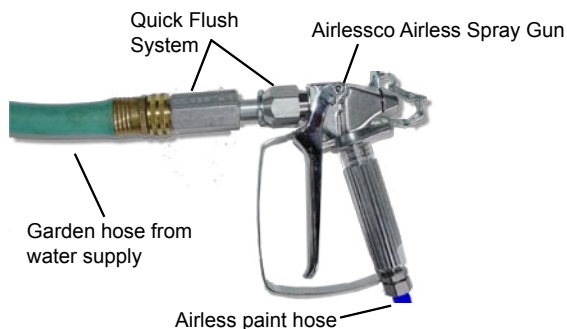

Step 4:

Attach a garden hose to the Quick Flush System; lock your gun open by putting the flat washer on the chain between the gun body and the retainer, then turn on your water supply to full pressure.

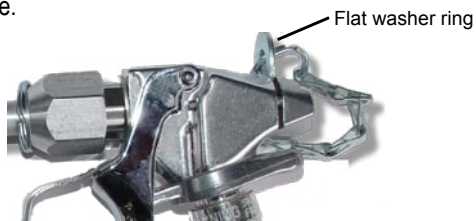

Step 5:

Hold return hose in the paint container and open the prime pressure valve.

Step 6:

Once water appears in the paint, close the prime pressure valve and place the return hose back into the empty bucket with the suction hose.

Step 7:

Open prime pressure valve & use the water flowing through the return hose to spray clean the suction hose & inlet strainer as you fill the bucket.

Step 8:

Turn on and cycle the pump slowly to flush the suction assembly and the fluid pump.

Step 9:

When bucket is half full, stop the pump, close the prime valve & clean outside of the suction assembly by hand. Remove suction assembly from bucket & dispose of the contaminated water per the paint manufacturer's instruction. Place suction assembly back into the clean empty bucket and open the prime pressure valve.

Step 10:

Turn off the machine and follow the Pressure Relief Procedure. Check the filters in the gun handle, the high-pressure filter (if equipped) and the inlet strainer to make sure they are clean. Reattach the tip and tip guard to the gun. The pump is now clean and ready for storage.

Step 11:

Once pump is clean, add Airlessco Pump Conditioner (1 oz. per gallon) to water in the bucket, turn off the water supply & remove the Quick Flush System from the gun. Place gun in bucket with the Pump Conditioner, shut your prime pressure valve & operate the gun using low pressure to flush the Pump Conditioner through gun and hose.



AIRLESSCO BY DUROTECH CO.

P.O. Box 8006, Moorpark, CA 93020-8006

5397 Commerce Ave., Moorpark, CA 93021

Tel: 805-523-0211 Fax: 805-523-1063

www.airlessco.com Email: sales@airlessco.com

Form No. 001-726 July05